

CP880I

LTE Outdoor Industrial CPE



TR069

PoE

IP67

IEEE802.11a/b/g/n/ac Wi-Fi


The CP880I from BTI Wireless is an industrial CPE, providing sustainable and durable LTE service with higher data transmission speed for video and other bandwidth-intensive applications. The industrial CP880I CPE has a special anti-vibration feature, which qualifies it for extreme environments where it is able to work in a temperature range from -40 °C to 70 °C. It is an ideal industrial CPE for outdoor scenarios with crucial industrial requirements, such as Railway, Transportation, Manufacturing, Mining, Oil and Gas, etc.

The CP880I is integrated with multiple LTE-A modules, which make it possible to connect with multiple bands of private LTE, including uncommon frequencies. CP880I also provides accurate, real-time location information via the built-in GNSS receiver, able to collaborate with GPS, GLONASS, BEIDOU and Galileo constellations.

CELLULAR SPECIFICATIONS

Peak Throughput	FDD: DL 400 Mbps UL 150 Mbps TDD: DL 280 Mbps UL 30 Mbps	
LTE Bands	CP880I-A	Band 1/3
	CP880I-B	Band 2/4/5/8/12/13/14/25/26/38/41/42/43/48/53/66
	CP880I-C	Band 46/240
Carrier Aggregation and MIMO	DL: 2 CA Intra- or Inter-band, 2 x 2 MIMO, 256 QAM UL: 2 CA or 2 x 2 MIMO, 64 QAM	
Tx / Rx	2Tx / 2Rx	
EIRP	< 23dBm (Include antenna)	
Receive Reference Sensitivity	Band 2/25 < 94dBm @ 20MHz	
	Band 42/43/48 < 95dBm @ 20 MHz	
	Band 5/26 < 97dBm @ 10MHz	
	Band 4/8/12/13/14/17/38/41/53/66 <96 dBm @ 20 MHz	

TOPOLOGY

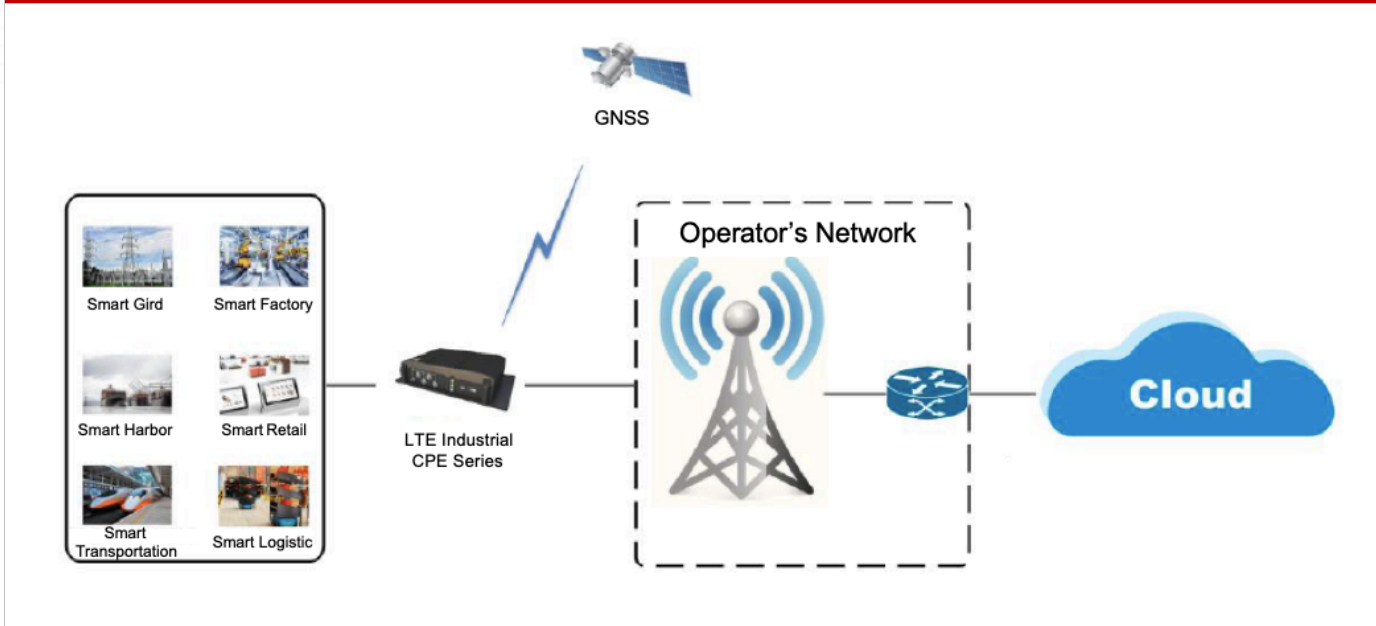

HARDWARE SPECIFICATIONS

Fixed Interfaces	2 x M12 for 10/100/1000 Mbps compatible GE 1 x M12 for RS232 + 2 x DI + 2 x DO 1 x M12 for RS485 2 x Nano SIM slot (4FF, DSSS)
Antenna Ports	2 x TNC female for cellular antennas 1 x TNC female for GNSS antenna 2 x TNC female for Wi-Fi antennas

GNSS	Support GPS, GLONASS, BEIDOU and Galileo Constellation Acquisition sensitivity: 148dBm (GPS at cold start) Tracking sensitivity: 167dBm (GPS in continuous mode)
LED Indicator	PWR, NET, Signal
Power Consumption	< 12W
EMC Compliance	EN55022: 2006 / A1:2007 (CE & RE) Class B IEC61000-4-2 (ESD) Level 3 IEC61000-4-3 (RS) Level 4 IEC61000-4-4 (EFT) Level 4 IEC61000-4-5 (Surge) Level 4 IEC61000-4-6 (CS) Level 3 IEC61000-4-8 (M/S) Level 4
Environment Compliance	Cold: IEC60068-2-1 Dry heat: IEC60068-2-2 Damp heat cyclic: IEC60068-2-30 Change of temperature: IEC60068-2-14 Shock: IEC60068-2-27 Free fall: IEC60068-2-32 Vibration: IEC60068-2-6/ EN50155
WAN	Multiple APN support, maximum 4 IP pass-through IPv4/IPv6 dual stack
LAN	VLAN 802.1Q DHCP server, client DNS and DNS proxy DMZ Multi-cast/ multi-cast proxy MAC address filtering GPS broadcast to LAN
Protocol	Routing: static routing, RIP, OSPF, IGMP proxy, BGP
Device Management	TR069 SNMP V3 Web UI Software upgrade via WEB/ TR069/ FOTA USIM PIN management
Routing Mode	Route mode Bridge mode NAT mode

	<ul style="list-style-type: none"> Static route Port mirror and port forwarding IPv4/ IPv6 dual stack
VPN	<ul style="list-style-type: none"> IPsec PPTP GRE tunnel (L2/L3) L2TPv2 and L2TPv3 VPN pass-through
Security	<ul style="list-style-type: none"> Firewall MAC address filtering IP address filtering URL filtering Access control HTTPS login from WAN Dos attack protection 2 level of user authority
Reliability	<ul style="list-style-type: none"> Watchdog for automatic recovery Auto-rollback to previous version when upgrade fails Dual WAN for link backup
Operating Voltage	9V - 36V DC
Dimensions	290 mm x 189 mm x 56 mm 11.4 in x 7.44 in x 2.20 in
Weight	< 2500 g 5.51 lbs

ENVIRONMENT SPECIFICATIONS

Temperature	Operating	-40 °C ~ 70 °C -22 °F ~ 158 °F
	Storage	-40 °C ~ 85 °C -40 °F ~ 185 °F
Humidity	Operating	10 ~ 90%
	Storage	5 ~ 95%

Contact Us
www.btiwireless.com
sales@btiwireless.com